



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

REC'D 13 JAN 2005	
WIPO	PCT


I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

BEST AVAILABLE COPY

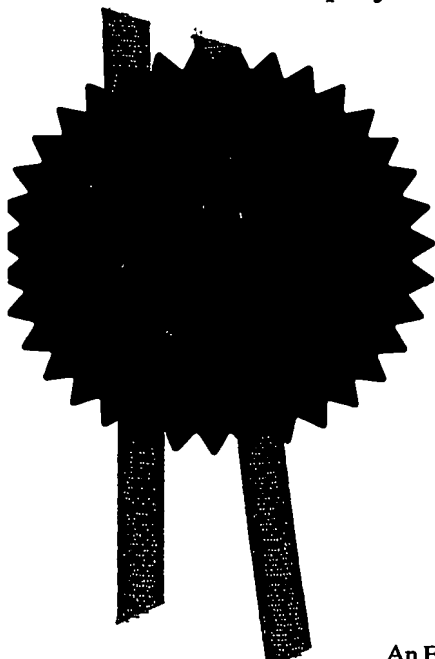

Signed

*H. Behan*

Dated 22 December 2004

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

# The Patent Office

1/77

04DEC03 E856984-2 D00354  
P01/7700 0.00-0328054.2

## Request for grant of a patent

(see the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

THE PATENT OFFICE K - 4 DEC 2003 NEWPORT	The Patent Office Cardiff Road Newport Gwent NP9 1RH
---	---

NSP/P089523GB

0328054.2

04 DEC 2003

COUNCIL FOR THE CENTRAL LABORATORY OF  
THE RESEARCH COUNCILS  
DARESBUURY LABORATORY  
DARESBUURY  
WARRINGTON  
WA4 4AD

6767131002

UNITED KINGDOM

1. Your reference
2. Patent application number  
(The Patent Office will fill in this part)
3. Full name, address and postcode of the or of  
each applicant (underline all surnames)

Patents ADP number (if you know it)

If the applicant is a corporate body, give the  
country/state of its incorporation

4. Title of the invention

FLUID PROBE

5. Name of your agent (if you have one)

Marks & Clerk

"Address for service" in the United Kingdom  
to which all correspondence should be sent  
(including the postcode)

Sussex House  
83-85 Mosley Street  
Manchester  
M2 3LG

Patents ADP number (if you know it)

18004 ✓

6. Priority: Complete this section if you are  
declaring priority from one or more earlier  
patent applications, filed in the last 12 months.

Country

Priority application number  
(if you know it)

Date of filing  
(day/month/year)

7. Divisionals, etc: Complete this section only if  
this application is a divisional application or  
resulted from an entitlement dispute (see note f)

Number of earlier UK application

Date of filing  
(day/month/year)

8. Is Patents Form 7/77 (Statement of  
inventorship and of right to grant of a patent)  
required in support of this request?

Answer YES if:

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an  
applicant, or

c) any named applicant is a corporate body.

Otherwise answer NO (See note d)

YES

**Patents Form 1/77**

9. Accompanying documents: A patent application must include a description of the invention. Not counting duplicates, please enter the number of pages of each item accompanying this form:

Continuation sheets of this form

Description	28	/
Claim(s)	5	/
Abstract	1	/
Drawing(s)	5	+5 8/

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of Inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

1 /

Request for substantive examination (*Patents Form 10/77*)

Any other documents  
(Please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature(s)

MARKS & CLERK

*Marks & Clerk*

Date 03/11/03

12. Name, daytime telephone number and e-mail address, if any, of person to contact in the United Kingdom

MR NEIL PARKINSON  
0161 233 5822

**Warning**

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

**Notes**

a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 08495 500505.

b) Write your answers in capital letters using black ink or you may type them.

c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.

d) If you have answered YES in part 8, a Patents Form 7/77 will need to be filed.

e) Once you have filled in the form you must remember to sign and date it.

f) Part 7 should only be completed when a divisional application is being made under section 15(4), or when an application is being made under section 8(3), 12(6) or 37(4) following an entitlement dispute. By completing part 7 you are requesting that this application takes the same filing date as an earlier UK application. If you want the new application to have the same priority date(s) as the earlier UK applications, you should also complete part 6 with the priority details.

DUPLICATE

## FLUID PROBE

This invention relates to the determination of properties of fluids, and in particular is suitable for, although not restricted to, the determination of the viscosity of fluids such as blood.

Determining the properties of a fluid is crucial in a wide range of industries. For example it is important to know the viscosity of oil in the oil industry and the temperature of milk in a dairy. Measurements can be taken continuously in real time, or at specific times, either with an appropriate 'in-situ' sensor, or by placing an appropriate sensor into the fluid of interest and then taking a reading.

An important property of many fluids is its viscosity. For example, the viscosity of the blood is crucial to the determination of the blood pressure of the patient. Furthermore, by continuous monitoring of a blood sample, the rate of clotting can be determined. The clotting rate of a patient's blood can be used to diagnose certain conditions, such as deep vein thrombosis.

Current devices used for measuring viscosity ('viscometers' or "viscosimeters") have a number of disadvantages. The devices are generally large, bulky and expensive to both purchase and manufacture.

If a fluid sample is valuable, for example economically (a new medicine) or otherwise (the blood of a patient), it is undesirable to use and possibly waste large amounts of that sample in determining its properties. Due to the large size of state of the art viscometers, a correspondingly large fluid sample has to be utilised. Furthermore, it is often necessary to take a sample from its local environment in order to undertake a measurement. In doing so, stabilising agents often have to be added to the sample so as to prevent the measurements of the sample being adversely affected during transport from the sampling site to the viscometer. For example, coagulants are added to blood when retrieved from a patient so as to prevent the blood from clotting when exposed to air. Any addition of such an agent contaminates or reduces the purity of

the sample, often affecting its properties and is thus undesirable. Ideally, measurements should be taken either in-situ, or without the need for addition of agents.

According to the present invention there is provided a device for detecting a property of a fluid comprising a body region, a flexible element having a first end and a second end, said first end being fixedly located on said body region, said flexible element being arranged to move from at least a first configuration to a second configuration via bending of said flexible element said flexible element comprising an actuating portion arranged to move said flexible element between said first configuration and said second configuration and a movement detector for detecting movement of said flexible element.

The inventors have realised that such an apparatus can be used to measure the viscosity, shear, flow rate or temperature of a fluid. Furthermore, the device can be constructed so as to be of dimensions of the order of micrometers. Hence, in-situ or on location measurements can be made of extremely small samples, negating the need for addition of stabilising agents.

The flexible element may comprise a laminate of at least two layers.

The actuating portion may be provided by at least a first layer of said laminate having a different coefficient of thermal expansion from a second layer of said laminate such that a change in temperature of said flexible element moves the flexible element from said first configuration to said second configuration.

One of the layers may comprise a piezoelectric material, arranged such that an electric field applied across said piezoelectric material moves said flexible element between said first configuration and said second configuration.

The actuating portion may comprise a magnetic material for movement of the flexible element between said first configuration and said second configuration by a magnetic field.

The movement detector may comprise latching means arranged to hold the flexible element in at least one of said two configurations.

The flexible element may comprise a heating element for heating at least said flexible element.

The movement detector may be arranged such that an electrical property of said movement detector changes due to movement of said flexible element.

The movement detector may comprise a piezoresistive element located on said flexible element arranged such that the electrical resistance of the piezoresistive element changes due to movement of said flexible element.

The movement detector may comprise a capacitor having two plates, the flexible element forming one plate thereof, and an electrically conducting plate forming the other plate, such that the capacitance of said capacitor changes due to movement of said flexible element.

The movement detector may comprise an electromagnetic radiation source arranged to direct radiation towards said element, and an electromagnetic radiation detector arranged to detect electromagnetic radiation at least one of: reflected from, transmitted through, refracted from or diffracted by said flexible element.

According to a second aspect of the present invention there is provided a method of determining a property of a fluid using a sensing element comprising: a flexible element movable from a first configuration to a second configuration via bending of said flexible element, said flexible element comprising an actuating portion arranged to move said flexible element between said first configuration and said second

configuration, the method comprising receiving a signal from the sensing element, the signal being indicative of movement of the flexible element within said fluid and processing said signal to determine at least one property of said fluid.

The signal may be processed to determine at least one property of a group comprising viscosity, temperature, flow rate and shear rate.

The method may further include the step of inducing movement in said flexible element by applying a movement signal to said sensing element.

The method may further comprise the step of determining the resonant frequency of said flexible element in said fluid by applying a plurality of different frequency movement signals to said sensing element, monitoring the amplitude of movement of said flexible element from said received signal to identify a resonant frequency of said flexible element and determining the viscosity of said fluid from the identified resonant frequency.

The method may further comprise the step of determining a rate of change of movement of said flexible element, by monitoring a change in the received signal with time and determining the viscosity of said fluid from said rate of change of movement.

The method may further comprise the step of determining an amplitude of movement of said flexible element from said received signal for a given applied movement signal and determining the viscosity of said fluid from said amplitude.

The flexible element may comprise a laminate of at least two layers, each layer having a different coefficient of thermal expansion, arranged such that said movement will occur with a temperature change in said flexible element, the method further comprising:

determining a temperature of said fluid from said received signal.

The method may further comprise the steps of determining a magnitude of movement of said flexible element and determining a flow rate of the fluid from said magnitude, said movement being due to flow of the fluid against said flexible element.

The method may further comprise determining a shear rate of said fluid by determination of the flow rate at a plurality of locations within said fluid.

According to a third aspect, the present invention provides a method of manufacture of a device for detecting properties of a fluid, the method comprising providing a body region, providing a flexible element having a first end and a second end, said first end being fixedly located on said body region, said flexible element being arranged to move from at least a first configuration to a second configuration via bending of said flexible element; and said flexible element comprising an actuating portion arranged to move said flexible element between said first configuration and said second configuration; and providing a movement detector for detecting movement of said flexible element.

Embodiments of the invention will now be described by way of example with reference to the accompanying figures in which:

Figure 1 is a perspective view of a detection device in accordance with a preferred embodiment of the invention;

Figure 2 is a circuit diagram of a Wheatstone bridge circuit forming part of the device shown in Figure 1;

Figure 3 is a simplified perspective view of the detecting device of Figure 1;

Figure 4 is a graphical representation relating an input signal to a detecting device to the change in resistance of a constituent piezoresistive element;

Figure 5 is a perspective view of a detecting device in accordance with another embodiment; Figure 6 is a perspective view of a detecting device in accordance with a further embodiment;

and



Figure 7 is a perspective view of a detecting device in accordance with yet another embodiment.

Illustrated in Figure 1 is a perspective view of a detection device 1 according to a preferred embodiment of the present invention. The detection device 1 comprises a body region 2, a flexible element 3, a heater 4 and a Wheatstone bridge circuit 5.

The flexible element 3 is an integral part of and extends from the body region 2. The flexible element is a bar with a rectangular surface area, with the longer side of the rectangle extending from the body region. The flexible element 3 comprises a laminate of two layers 3a, 3b, the materials of each layer having different coefficients of thermal expansion. The materials can be different materials, or the same material processed (e.g. stressed) so as to have different coefficients of thermal expansion.

Under application of heat, one layer will expand more than the other for the same rise in temperature, and hence the flexible element 3 will bend in the direction of the material with the lower coefficient of thermal expansion. Upon cooling, one layer will contract faster than another for the same decrease in temperature, and hence the flexible element 3 will then bend in the direction of the material with the greater coefficient of thermal expansion.

The heater 4 is located on the flexible element 3, and comprises conductive material forming a continuous line or track 4a across an area of the upper surface of the flexible element 3. The heater 4 further comprises electrical contacts 4b for delivery of current to (and resulting in heat dissipation from) the heater 4. These electrical contacts 4b are located on an upper surface of the body region 2.

Wheatstone bridge circuits 5 are well known in the art as being particularly sensitive apparatus for the measurement of capacitance and resistance. A Wheatstone bridge circuit 5 is located on the body region 2 and flexible element 3. The Wheatstone bridge 5 comprises four 'legs' or 'arms' 5a, 5b, 5c, 5d, three of which 5b, 5c, 5d, reside on the body region 2, and one of which 5a resides on the flexible element 3

immediately adjacent the body region 2. The three legs 5b, 5c, 5d residing on the body region 2 each comprise a resistance of a known value. The fourth leg 5a, residing on the flexible element 3, comprises a piezoresistive element 5a. A piezoresistive material is one whose electrical resistance changes upon the application thereon of mechanical strain. Furthermore, the Wheatstone bridge circuit 5 comprises electrical contacts 5e, 5f on an upper surface of the body region 2 for input and output of electrical signals. The Wheatstone bridge circuit 5 is illustrated in Figure 2.

In use, a voltage is applied across the Wheatstone bridge circuit 5 via contacts 5e, and a voltage output is measured across the middle from contacts 5f. When the output of the bridge 5 is zero, the bridge 5 is said to be balanced and the resistances equal. When the resistance of one of the legs 5a, 5b, 5c, 5d, changes, the previously balanced bridge 5 is now unbalanced. This unbalance causes a voltage to appear across the middle of the bridge 5. From this value, the change in resistance can be calculated. However, the bridge 5 need not be balanced initially. Although the initial output voltage may then be non-zero in magnitude, the non-zero value can be used as a relative zero value. The only substantial variation in resistance of the Wheatstone bridge 5 will arise from the piezoresistive element, thus it can be assumed that any substantial variation in voltage output is attributed to the movement of the flexible element 3. Preferably the three known resistances are identical and in close proximity to compensate for any temperature variations etc.

Surface micro machining of thin films can be used to construct the device shown in Figure 1. Polyimide and gold films are used to produce the flexible element 3. Polyimide (DuPont, Pyralene PI2566) is chosen for its high coefficient of thermal expansion ( $60 \times 10^{-6} \text{ K}^{-1}$ ) and small Young's modulus (1.75 GPa), allowing large displacements with small change in temperature. Also, polyimide films can be easily spin-coated from the liquid phase allowing a range of thickness to be tested for optimum deflection. Many other plastic polymers can be used, also spin coated in their liquid phase, such as PI2722, PI2723 (both of which have a coefficient of thermal expansion of  $57 \times 10^{-6} \text{ K}^{-1}$ ) or PI2734 (coefficient of thermal expansion of  $13 \times 10^{-6} \text{ K}^{-1}$ ). Gold was chosen because of its appropriate mechanical and thermal

properties with respect to the PI2566 polyimide. For example, gold has a considerably lower coefficient of thermal expansion ( $14 \times 10^{-6} \text{ K}^{-1}$ ) than PI2566.

A method based on controlled delamination of thin films from a substrate through forced variation is employed. This approach eliminates the need to protect layers from chemical degradation during a final etch release step and also allows freeing of arbitrary large areas.

The delamination technique is based on optical lithography and exploits the weak adhesion of gold to silicon, silicon dioxide or glass. By inducing stresses in constituent layers of the flexible element 3, then releasing it from an anchoring layer on substrate 2, it may curl at a non-fixed end, extending from the body region 2. Any of the three materials (silicon, silicon dioxide or glass) may be successfully used as the substrate 2, which (substantially) forms the body region 2.

A thin layer of Cr, Ni or N-Cr (500 Å) 2a is plasma sputtered onto the substrate 2 and acts as a first adhesion promoter between the substrate 2 and subsequently plasma sputtered gold barrier layer 2b (1000 Å). The gold barrier layer 2b is deposited to prevent oxidation of the adhesion promoter 2a upon exposure to air. The first adhesion promoter layer 2a and gold barrier layer 2b are then patterned to define the area from where the flexible element 3 will be released i.e. parts of the first adhesion promoter layer 2a are removed. Patterning is done using standard lithography and wet etching techniques, obtaining openings in the first adhesion promoter layer 2a for the later forced delamination of the flexible element 3. The pattern is essentially the inverse of the anchoring layer image i.e. material deposited above the region enclosed by the open ended rectangular structure will eventually form the flexible element 3, whereas material deposited about this region will form the anchoring layer from which the flexible element 3 will be released. The pattern is a thin track defining three sides of a rectangle of dimensions  $500\mu\text{m}$  by  $80\mu\text{m}$ , and thereby an 'open ended' rectangular structure. This effectively defines the size of the flexible element 3, which is also  $500\mu\text{m}$  by  $80\mu\text{m}$ . In being open ended, upon release, one end of the flexible

element 3 remains fixed to the body region 2, while another is free to move, extending from the body region 2.

A gold structural layer (1.2  $\mu\text{m}$  thick) 2c, 3a is then plasma sputtered on top of the patterned gold barrier layer (1000  $\text{\AA}$ ). The gold structural layer acts only as a passive mechanical layer and is electrically insulated from a heater 4 by a polyimide layer 2d, 3b whose deposition is described herein below. In the same deposition run, a thin Cr layer (not shown) ( $<500\text{\AA}$ ) is deposited over the gold structural layer to act as an adhesion promoter for a subsequent polyimide layer.

A polyimide layer of PI2566 2d, 3b is then spin coated over the gold structural layer 2c, 3a from the liquid phase and soft baked at  $120^{\circ}\text{C}$  in an oven for 20 minutes. Thereafter, a  $1500\text{\AA}$  thick Ni-Cr layer is sputter coated and patterned to form the heater tracks 4a, contact pads 4b and signal lines. Standard photolithography was carried out using positive tone photoresist to pattern the flexible element 3 and define contact pads. Patterning was done using wet chemical etching. However, an alternative technique would be reactive ion etching (RIE) of the polyimide layer. This would require a Cr layer to act as hard mask. Using similar techniques, a resistive Wheatstone bridge circuit 5 is also deposited, including a constituent piezoresistive element 5a and contact pads 5e, 5f.

Finally, following the final depositions, a wet Au etch is performed to release the flexible element 3 from the anchoring layer. Due to the initial stresses in the constituent layers of the flexible element 3, there is no need for special release recipes. The induced force prevents the flexible element 3 from sticking to the substrate 2. Thus, upon release, the flexible element 3 bends up and away from the body region 1.

The thickness of the gold structural layer 2c, 3a of the flexible element 3 ( $1.2\mu\text{m}$ ) was chosen to offer good actuation results. The value of  $1.2\mu\text{m}$  was empirically established. It was also established that for the mechanical properties of the constituent materials of the flexible element 3 (Gold, PI2566), a thickness ratio of 4:1

produced the greatest initial deflections, whereas a thickness ratio of 8:1 gave optimum experimental results. It will be appreciated that other thicknesses and ratios thereof could be employed. Also, thickness variation of the polyimide layer 2d, 3b can be achieved by varying the spin speed during spin coating. It will be appreciated that a second layer of PI2566 could be spin coated to embed the heater 4 structure for improved thermal insulation and also mechanical protection.

It will be appreciated that stress within constituent layers may be sufficient to cause, upon release, the flexible element 3 to bend so much that it curls back on itself, forming a 'roll' of material. Most preferably fabrication of the detecting device 1 is such that this situation is avoided, such that upon release, the flexible element 3 does not form such a roll. Preferably, the coefficients of thermal expansion of the constituent layers 3a, 3b of the flexible element 3 are different along the length of the flexible element 3 (defined by the distance from the point at which the flexible element 3 is fixed to the point at which it is free), but the same along the width of the element, such that the flexible element 3 bends along its length, but does not bend substantially across its width.

For ease of description, use of the detecting device 1 is now described wherein the flexible element 3 is flat and unbent. Parts of the body region 2 not attached to and surrounding the flexible element 3 are no longer illustrated so as to highlight the flexible element 3. Additionally, Figures 3 to 5 are less detailed than Figure 1, in so far as they do not illustrate constituent layers of the device 1. Similar parts are given the same reference numerals in each Figure.

When a current is made to pass through the track 4a of the heater 4 shown in Figure 1, via the application of a potential difference across the heater contacts 4b, heat is dissipated due to electrical resistance in the track 4a. This heat causes the temperature of the flexible element 3 to increase. In heating the flexible element 3, one layer of the laminate 3b will expand at a greater rate than the other 3a due to the differential in their respective coefficients of thermal expansion. Hence, as illustrated in Figure 3, the flexible element 3 will bend and become straighter - the flexible element has been

made to move from a first to a second configuration. In bending, the flexible element 3 induces a strain on the piezoresistive element 5a that will induce a change in its electrical resistance. Hence, in conjunction with the piezoresistive element, the Wheatstone bridge 5 can be used as a strain gauge, the output voltage of the Wheatstone bridge circuit 5 reflecting the (change in) electrical resistance of (and strain upon) of the piezoresistive element 5a.

For a given input signal to the heater 4, the flexible element 3 will move (or 'deflect') a certain amount. If the movement signal is repetitive, varying from a 'current on' to a 'current low' or even 'current zero' value, the flexible element 3 will continue to bend when it is heated, and will relax towards its equilibrium position when no (or less) heat is applied to it, accordingly. The flexible element 3 will effectively oscillate. If a damping force is applied that opposes the movement of the flexible element 3, it will take longer to reach only maximum possible deflection for a given input. Further, if the movement signal is pulsed, the element may not reach this maximum deflection, as the element is bent in the other direction due to the change in movement signal. These effects can be used to detect and determine the viscosity of a fluid.

A more viscous fluid will have a greater damping effect on the movement of the flexible element 3 than a less viscous one. The change in deflection corresponds to a change in strain on the piezoresistive element 5a, which in turn alters its resistance. As the piezoresistive element 5a is a leg of a Wheatstone bridge 5, the change is reflected in a change of output voltage of the Wheatstone bridge 5. Thus, from the output of the Wheatstone bridge 5, the change in deflection can be directly measured, and this corresponds to a change in the viscosity of the fluid. Figure 4 illustrates the effect of damping on the movement of the flexible element 3.

Figure 4 has two graphs, one illustrating the current supplied to the heater 4 and a corresponding graph displaying the corresponding absolute change in the resistance of the piezoresistive element 5a in fluids of different viscosities 7, 8. A square wave signal 6 is applied to the heater 4, and therefore heat to the flexible element 3. The application of heat induces movement of the flexible element 3, which in turn causes

a strain to be induced in the piezoresistive element 5a. Consequently, the resistance of the piezoresistive element 5a will change 7 with movement of the flexible element, which is directly related to the application of heat from the heater 4. By locating the flexible element 3 in a more viscous fluid, the movement of the flexible element 3 will be damped. The resistance of the flexible element 3 will change less rapidly in a more viscous fluid 8. Further, in the example shown, the amplitude of resistance is less in the more viscous fluid 8. The change in resistance can thus be used to determine a change in the viscosity of a fluid.

The resistance at the end of the signal pulse can be used to determine the maximum deflection, this maximum changing for fluids of different viscosities. However, it may be the case that the pulse duration (current 'on' time) is too great for the change in deflection to be resolved i.e. the flexible element 3 has the same maximum deflection in liquids of different viscosities for an identical input signal. This can be accounted for by varying the length of time for which current is applied to the heater 4 (and hence heat to the flexible element 3), and/or the magnitude of the current, and/or the period between successive current pulses. In short, the input signal can be tailored to the situation as appropriate.

Alternatively, the resistance of the piezoresistive element 5a is monitored continuously such that its change with respect to time can be observed. Hence, even if the resistance at the end of a pulse (i.e. the deflection of the flexible element 3) is the same, the rate of change of resistance will be different for fluids of different viscosities. The resistance of the piezoresistive element 5a will change more rapidly for a fluid of one viscosity than for a fluid with a second, higher viscosity. This is simply a consequence of the fact that, with a constant driving force, a body's movement is quicker through a less viscous liquid than for a fluid of a higher viscosity. Most preferably, the input signal is such that when no current is applied, the flexible element 3 is allowed to return to its equilibrium position i.e. dissipate all heat energy provided by the heater 4. Preferably, when no current is supplied to the heater 4, the heater 4 supplies no heat to the flexible element 3 i.e. the heater 4 dissipates heat extremely quickly. If the flexible element 3 is made to oscillate, preferably the

frequency of the input signal is optimised to the dimensions of the flexible element. A high sampling rate (and hence high frequency oscillation) may be required for some applications. It will be readily appreciated that the same results can be achieved from a single input pulse, causing a single deflection of the flexible element 3, for each experiment.

As well as using the change in resistance/deflection to measure the viscosity of a fluid, the resonant frequency of the flexible element 3 can also be utilised for the same purpose. A resonant system is one in which a large oscillation is produced by a small stimulus of approximately the same frequency. The frequency at which this occurs for a given system is dependant upon the viscosity of the medium in which the oscillating part of the system is immersed. Thus, the flexible element 3 of the detecting device 1 will have an intrinsic resonant frequency unique to the fluid in which it is immersed. Thus, by varying the driving frequency (the input signal to the heater 4) of the flexible element 3, while simultaneously monitoring the resistance of the piezoelectric element 5a (and thus deflection of the flexible element 3), the amplitude of deflection of the flexible element 3 can be directly related to its driving frequency. Thus, the resonant frequency of the flexible element 3 can be readily identified, and the viscosity of the fluid derived therefrom.

With its strain and temperature sensitivity, it is clear to see that such a detecting device 1 has many applications other than the measurement of viscosity. For example, the device 1 can be used to measure temperature, flow rate and shear of a fluid.

As with the application of heat from the heater 4, environmental heat will cause the constituent layers of the flexible element 3 to expand/contract accordingly. This expansion/contraction induces a change in the strain on the piezoresistive element which is detectable from the output of the Wheatstone bridge circuit 5 of which it is a crucial part. Thus, if environmental heat is used to move the flexible element 3, a thermometer is created.

It has already been described how the Wheatstone bridge circuit 5 effectively operates as a strain gauge, using the piezoresistive element's 5a inherent properties to achieve



such functionality. If the flexible element 5a is placed in a flowing fluid with no current applied to the heater 4, the deflection of the flexible element 3 can be used to determine the flow rate of that fluid. The faster the flow of the fluid, the more constituent material per unit time is incident upon the flexible element 3 and thus the greater the force upon the flexible element 3. A greater force on the flexible element 3 results in a greater deflection thereof.

The properties of a fluid sample can be determined in a plurality of locations, thus determining a profile of said sample with respect to said property. For example, by measuring the flow rate of a fluid sample at a number of locations, a flow rate profile, and thus the shear rate, can be determined. One such way of achieving a profile is to use a single device 1 and move it through the sample, taking measurements at desired locations. However, this leaves the possibility that a property at a specific location may change between successive measurements, thus giving an inaccurate profile i.e. the property at the first location may change by the time a measurement at another location is made. Ideally, the measurements can be simultaneously taken at the desired number of locations. Preferably the measurements can be taken in real time. Real time measurement may yield further fluid sample information, such as the clotting time of blood. By using a plurality of detecting devices 1, preferably one for each desired measurement location, such real time, multi-location measurement and thus profiling can be achieved.

It is clear that use of such a detecting device 1 will yield only relative values of viscosity, temperature, etc. For example, an oscillating flexible element 3 will deflect substantially less in motor oil than in air. To obtain absolute values, calibration of the detecting device 1 and modelling of the fluid and/or flexible element 3 of the detecting device 1 may be required. For example, deflection of the flexible element 3 for a given input signal may be measured in one or more fluids of known viscosities, and from that, a specific change in deflection can be related to a specific change in viscosity. It will also be appreciated that accurate modelling of the flexible element 3 and its movement can yield properties about a fluid in which it is immersed. It will also be appreciated that there are a variety of interdependent factors that may have a

measurable effect on a given measurement. For example, in heating the flexible element 3 to induce movement therein, some heat energy will undoubtedly be transferred to the fluid in which the device 1 is immersed. Such heat dissipation will raise the temperature of the fluid and may alter its viscosity, thereby giving a false measurement thereof. Similarly, the electrical resistance of the piezoresistive element 5a will change with temperature, the temperature itself being related to the temperature of the fluid plus any effects due to the heater 4. All of these problems may be overcome via a combination of calibration and/or modelling of the elements necessary to perform a desired measurement.

In another embodiment (not shown), the device 1 is generally similar to that described in relation to Figures 1 and 2. However, in this embodiment the Wheatstone bridge 5 now comprises capacitive elements as opposed to resistive elements, and the piezoresistive element has been removed. Instead, a conductive plate is located above, but not in contact with, the flexible element 3. Whereas in the device 1 of Figure 1 a changing output signal resulted from a strain on, and corresponding change in electrical resistance of, a piezoresistive element, in this embodiment, changes in capacitance are used to detect movement of the flexible element 3. The Wheatstone bridge 5 comprises a known capacitance on each of three of its arms, and the conductive plate and flexible element 3 form the plates of a fourth (variable capacitance) capacitor. If the flexible element 3 moves, the separation between it and the conductive plate above will change and, from basic electrostatic theory, so will the capacitance of this fourth capacitor. This detector device 1 operates in an otherwise identical manner to, and has the functionality of, the detector device 1 of Figures 1 and 2.

It will be clear to one skilled in the art that all of the aforementioned embodiments are not restrictive in any way, and are given by way of example only. For example, all embodiments of the invention described thus far comprise a Wheatstone bridge 5 having four legs 5a, 5b, 5c, 5d, three of which 5b, 5c, 5d each comprise a constant and known value of resistance/capacitance. The fourth leg 5a comprises a variable resistance/capacitance sensitive to movement of the flexible element 3. By

incorporating more movement sensitive resistances/capacitances in other legs of the Wheatstone bridge 5 (i.e. replacing the known and constant value components) the sensitivity of the bridge may be increased. The sensitivity of the Wheatstone bridge 5 is defined by the change in its output voltage for a small change in its input parameters i.e. variable resistance. If the output voltage can be made to be greater for the same or smaller change in its input parameters, its sensitivity is said to have increased. In comparison with the use of one leg, the use of two legs yields a two-fold increase in sensitivity, three legs a three-fold increase and four legs a four-fold increase. The incorporation of such additional movement sensitive resistances/capacitances can be achieved in a number of ways.

Taking a detecting device 1 incorporating a piezoresistive element for example, two legs of a Wheatstone bridge 5 may each comprise a piezoelectric element. The piezoresistive elements of two adjacent flexible elements may form two of the legs of the Wheatstone bridge. Alternatively, using only a single flexible element 3, another piezoresistive element (in addition to that residing on the flexible element 3 immediately adjacent the body region 2) may reside on the flexible element 3. By forming a Wheatstone bridge 5 utilising each piezoresistive element as a leg of the bridge, a more sensitive strain gauge is created. For example, an additional piezoresistive element may reside on the upper surface of the flexible element 3 at a point remote from the body region 2.

It will be appreciated that the piezoresistive element 5a may reside anywhere on the flexible element 3, so long as the strain that is under changes when the flexible element 3 moves. For example, the piezoresistive element 5a may be underneath the flexible element 3. The piezoresistive element 5a may reside on the flexible element 3 adjacent the body region 2 of the detecting device 1, at a point remote from the body region 2 or at a point somewhere in-between these extremes. The piezoresistive element 5a may reside on both the body region 2 and the flexible element 3 such that only a part thereof is under strain when movement is induced within the flexible element 3. The piezoresistive element 5a may be part of the flexible element 3. The piezoresistive element 5a may be a layer of the flexible element 3. It will also be clear

to one skilled in the art that preferably, saturation of the piezoresistive element 5a is not encountered before maximum strain i.e. it has a unique electrical resistance for a unique applied strain (and associated movement of the flexible element 3)

Figures 5 and 6 are perspective views of further embodiments of the current invention, again with flexible element 3 in a 'pre-stressed' state – initially straight. In these embodiments, detection of the movement of a flexible element 3 is undertaken using optical techniques, replacing the Wheatstone bridge circuits 5 and the variable capacitance/resistance elements of the aforementioned embodiments. Save for this replacement, the structure of the body region 2, heater 4 and flexible element 3 is identical to that described in relation to Figures 1 and 2, thus the functionality of these detection devices 1 remains unchanged. Hence, elements present in Figures 5 and 6 that are present in Figures 1 and 2 are given like reference numerals.

Referring to Figure 5, the detecting device 1 comprises a body region 2, a flexible element 3, a heater 4 and a waveguide structure 9. The waveguide structure 9 is located within the detecting device 1, extending from the body region 2, through the flexible element 3 and to an outer surface of the flexible element 3 remote to the body region 2. An electromagnetic radiation source 10 is located within the body region 2, so as to irradiate an entrance to the waveguide 9 and cause electromagnetic radiation to be transmitted therethrough. The transmitted electromagnetic radiation will pass through the waveguide 9 and will be emitted from both the detecting device 1 and the waveguide 9 at the outer surface of the flexible element 3 remote to the body region 2. The emitted radiation may be detected by use of a photodiode array 11. The resolution of the photodiode array 11 can be tailored to the desired measurement resolution. For example, the smaller the diodes in the array 11 (or more densely packed they are) the higher its resolution, thus allowing a smaller movement in the flexible element 3 to be detected.

In use, heat is supplied to the flexible element 3 via the heater 4 (or by the local environment) so as to cause it to bend from its initially bent configuration towards a straight configuration. The degree to which the flexible element 3 bends is

proportional to the number of photodiodes 11 that are excited and thus the movement of the flexible element 3 can be determined.

Referring now to Figure 6, the detecting device 1 comprises a body region 2, a flexible element 3 and a heater 4. The flexible element 3 comprises a grating 12, the grating 12 being formed by transparent and opaque sections parallel to one another. The grating 12 extends along a substantial length of the flexible element 3, away from the body region 2. A photodiode array 11 is located on one side of the flexible element 3, and an electromagnetic radiation source 10 on an opposite side, such that electromagnetic radiation may be emitted from the source 10, be transmitted through the transparent sections of the grating 12 and be detected by the photodiode array 11. Depending on the size of the opaque and transparent sections (or 'pitch' thereof) the detecting device 1 can be used in one of two ways. The grating 12 may be used as a pure light filter, the shadow of the grating 12 falling on the photodiode array 11. Alternatively, the grating 12 can be configured so as to cause incident radiation to diffract. In diffracting, the electromagnetic radiation may constructively and destructively interfere with itself, thereby creating an interference pattern on the photodiode array 11. Most preferably the electromagnetic radiation source 10 is chosen so that the radiation it emits does not penetrate the opaque sections of the grating 12 i.e. visible light is most preferable to x-rays.

In use, heat is supplied to the flexible element 3 via the heater 4 (or by the local environment) so as to cause it to bend from its initially bent configuration towards a straight configuration. In bending, the pitch of the opaque and transparent sections will change. Such a change will have an effect on the electromagnetic radiation that is transmitted through the grating 12 and, depending on how the grating 12 is configured, either the shadow of the grating 12 or the interference pattern on the photodiode array 11 will change. Patterns in maxima and minima of the pattern/shadow can be used to determine the change in pitch of the sections of the grating 12, and this change is proportional to the movement (curvature) of the flexible element 3.

It will be appreciated that the transmissive grating 12 could be replaced with a reflective grating 12. The device 1 operates in exactly the same way, apart from the fact that the sections of the grating 12 are reflective and non-reflective, and the photodiode array 11 is on the same side as the electromagnetic radiation source 10, thereby detecting reflected, as opposed to transmitted electromagnetic radiation.

For all embodiments utilising optical detection methods, it will be appreciated that preferably the radiation source 10 and photodiode array 11 are chosen so as to compliment one another. For example, electromagnetic radiation from a source 10 with a peak emission wavelength of 640nm (red light) may be best detected with a photodiode array 11 with peak sensitivity either at or near that wavelength. Furthermore, it will be appreciated that the photodiode array 11 can be one or two-dimensional. A two-dimensional photodiode array 11 can be used to image the transmitted/reflected electromagnetic radiation. For example, in the case of the embodiment comprising a grating 12, the entire fringe pattern may be detected with a two-dimensional array 11, whereas a one-dimensional array 11 will only yield information in a line across said fringe pattern. Although a one-dimensional analysis may be sufficient, the detection and capturing of a two-dimensional image may be of some use. It will be obvious to one skilled in the art that the photodiode array 11 may be replaced with any detecting element with the desired properties in terms of detection range, resolution etc. For example, the detection of electromagnetic radiation may involve optical fibres and associated processing means.

It will be obvious to one skilled in the art that all of the aforementioned embodiments are not restrictive in any way, and are given by way of example only. It will be clear that various modifications may be made to the detecting device 1 while not detracting from the invention.

For example, although the determination of fluid properties has been shown to incorporate the use of the flexible element 3 moving from a flat to curved position, or curved to flat position, other 'initial' and 'final' positions or 'configurations' of the flexible element are possible. The flexible element may move from a first curved configuration to a second curved configuration. In order to determine properties of a

fluid, the flexible element must move from a first configuration to a second configuration. It may also move to other configurations thereafter. The first and second configurations may be the same.

It will be appreciated that a laminate of two layers with different thermal expansion coefficients is preferred when using the device 1 as a detector of temperature. However, it will be appreciated that depending on the use of the device 1, sensitivity to heat may not be essential, only movement of the flexible element 3 being required. For example, when viscosity information is being obtained from the device 1 via the driving of the flexible element 3 in a fluid, no temperature sensitivity is required. Hence other methods and means of driving the movement of the flexible element 3 may be employed. For example, a laminate incorporating one or more piezoelectric materials may be used, such that under an applied electric field, one layer of the laminate expands more than another, therefore causing bending of the flexible element 3. Of course, a laminate comprising a piezoelectric material can still be used as a thermometer if the different layers have different coefficients of thermal expansion. It will also be appreciated that other methods of driving the flexible element 3 are possible, such as the use of electric or magnetic fields.

For example, if the flexible element 3 comprises a magnetic material (such as cobalt) an electromagnet located adjacent the device 1 can be used to move the flexible element 3 between the first and second configuration. Alternatively, a magnetic material may be fixedly attached to the flexible element. When the electromagnet is 'on' it may be arranged to attract the magnetic material and consequently the flexible element 3. Alternatively, it may be arranged to repel the electromagnet. Thus, by applying an input signal of a specific form to the electromagnet, the flexible element 3 may be driven (moved) in a desired manner. Whether the electromagnet generates an attractive or repellent force, if the flexible element 3 is resilient, a build up of potential energy in the flexible element 3 (due to elasticity of the element 3) may oppose the attractive or repelling magnetic force. Such a build up of energy can generate a restoring force that may attempt to restore the position of the flexible element 3 to its equilibrium position. Thus, the magnetic force may be used to first

deflect the flexible element, and the restoring force may then move the flexible element towards its equilibrium position. Alternatively, the polarity of the electromagnet may be reversed in order to change the magnetic force on the magnetic material of the flexible element 3 from an attractive force to a repelling force. Thus a single electromagnet can be used to both attract and repel the flexible element 3.

The electromagnet may be integral to the device or the electromagnet may be a separate piece of apparatus. Alternatively, the flexible element may comprise an electromagnet, and the magnetic material may be a separate piece of apparatus, such that the magnetic material is fixed in position and the actuation of the electromagnet causes movement of the flexible element. It will be appreciated that any controllable source of variable magnetic field may be used instead of an electromagnet.

In an alternative embodiment illustrated in Figure 7, the flexible element 3 forms one plate of a capacitor like structure. The flexible element 3 comprises an electrically conductive layer 3c (such as gold) forming a first plate of the capacitor like structure. Another electrically conductive plate 13 (such as gold) forms a second plate of the capacitor like structure, and resides on the body region 2 of the device 1.

A potential difference applied between these two plates 3c, 13 causes opposing charges to build up on each plate 3c, 13, and an electric field is established between the plates. As opposite electrical charges attract, the plates 3c, 13 will be attracted toward each other. It will be appreciated that this attractive force can be used to move the flexible element 3. Preferably the second plate 13 is fixed in position i.e. not free to move. Thus, all movement generated is in the flexible element 3. Thus, by applying an input signal of a predetermined form to the capacitor like structure, the flexible element 3 may be moved in a desired manner from the first to the second configuration. Preferably, the flexible element 3 is resilient, such that upon removal of the electric field, the flexible element 3 will spring back from the second to the first configuration.



Electrical contact between the plates 3c, 13 is undesirable. The device 1 can be structured such that such electrical contact is not possible (not shown). For instance, the second plate 3c may reside in a recess in the body region 2 such that, even when the flexible element 3 is flat, the first 3c and second plates 13 are spatially separated and electrical contact therebetween prevented. Alternatively, in some embodiments, one (or each) of the plates is (are) coated in an electrically insulative layer (not shown) to prevent such electrical contact. The electrical insulator may be a plastic material.

It will be appreciated that the second plate 13 may not reside on the body region 2. For example, the location of the second plate 13 need only be such that an electric field may be established between the plates that is sufficient in magnitude to move the flexible element 3 from a first to a second configuration,

As hereinbefore described, it will be appreciated that the capacitor like structure may also act as a variable capacitor. By applying a constant potential difference between the plates 3c, 13, the separation between the plates 3c, 13 can be extrapolated from the capacitance of the capacitor using simple electrostatic theory. If the separation of the plates 3c, 13 changes, so will the capacitance of the capacitor. Thus, as the flexible element 3 comprises one plate of the capacitor, the variable capacitor can be used to detect and characterise movement of the flexible element 3.

As hereinbefore described, magnetic and electrostatic forces can be used to move the flexible element 3. Such forces (and the apparatus used to provide them) can also be used to hold (latch) the flexible element 3 in a desired position.

If, for example, heat is used to drive (move) the flexible element 3, electric or magnetic fields may be used to hold the flexible element in position once the heat has been removed. The electrostatic or magnetic force can be used to counterbalance the opposing restoring force in the flexible element that would otherwise restore it to its equilibrium position. This has significant advantages. For example, the flexible element 3 may be formed of two layers of different coefficients of thermal expansion

such that, when heated, it moves from a first configuration to a second configuration. An electric or magnetic field may then be applied to hold that flexible element 3 in position, whereafter the heat can be removed. The temperature of the flexible element 3 may then return to the ambient temperature of its surroundings i.e. the fluid in which it is immersed. The electric or magnetic field can then be removed, allowing the restoring force due to the temperature change to move the flexible element 3, and the motion of the flexible element 3 to be characterised at this ambient temperature. Thus, the heat required to move the flexible element 3 does not affect the results of the experiment. Furthermore, the use of electric or magnetic fields to hold the flexible element 3 in position is more energy efficient than the use of heat (or current supplied to a heater), thus reducing the power consumption of a device incorporating such features.

Furthermore, the flexible element 3 may not be a laminate of two materials. The flexible element 3 may be a single layer. The flexible element 3 may comprise more than two materials and/or layers e.g. it can be formed of multiple layers of piezoresistive material, or any other desired material. It will be appreciated that the size of the detecting device 1 may be chosen to suit a specific application to the situation. It will be appreciated that the size of the flexible element 3 may be chosen to suit a particular application. For example, sizes may range from the order to micrometers to the order of metres. The shape of the flexible element 3 is also variable. For example, the flexible element 3 may taper away from the body region 2. The flexible element 3 may flare outwards and away from the body region 2. The flexible element 3 may not be one continuous object. For example, the flexible element 3 may be a thin rectangular layer with sections cut out thereof. This may be for hydrodynamic purposes or otherwise. The flexible element 3 may even comprise an additional element secured to an end remote to the body region 2, for example a paddle. The paddle may be integral to the flexible element 3. The inclusion of a paddle may be used to increase the surface area of the flexible element, which may, for example, increase the detection sensitivity of the device for flow and shear rate measurements.

In embodiments utilising a heater 4, the heater and movement detector element may be separate. Alternatively, the heater 4 and movement detector element may be combined such that a single element performs both of the functions thereof. If the heater 4 comprises a material that is piezoresistive, the heater 4 may also function as the piezoresistive element 5a of the movement detector. The combined heater-movement detector may comprise a single material, such as gold. The piezoresistive behaviour of gold may be greatly enhanced by the use of an elastic support layer, such as a polyimide layer.

In order to form such a combined multi-layer heater-movement flexible detector element, a polyimide track is deposited on the flexible element 3, followed by a gold layer on top of that track. It will be appreciated that many configurations are possible in order to realise a combined heater-movement detector element. In order to function, the heater-movement detector element must dissipate heat and exhibit piezoresistive behaviour.

The flexible element 3 can be constructed so as to be straight at equilibrium (no applied signal) using specific fabrication methods. For example, specific stresses may be induced in one or more layers during heated fabrication thereof.

When using a heater 4 to induce movement in the flexible element 3, the type, shape and location of heater 4 may be chosen to suit the situation or design criteria. For example, the heater 4 may be on the top surface of the flexible element 3. The heater 4 may be located on the underside of the flexible element 3. The heater 4 may be embedded within the flexible element 3. For example, the heater 4 may reside between layers if the flexible element 3 is a laminate structure. This may ensure that the majority of heat is dissipated in the flexible element 3, as opposed to a fluid sample. This has two advantages, namely that efficiency is increased and, more importantly, the temperature of the sample is not raised artificially and thereby adversely affecting measurement. The heater 4 may be an electrically conductive material that dissipates heat. The heater 4 may be a separate device such as a non-integrated electrically conducting filament. The heater 4 may be a thin-film deposition

of an electrical conductive material. The heater 4 may be a track of a conductive material. For example, the heater 4 may be an electrically conductive track that weaves along, and back and forth across the flexible element 3, thereby creating a uniform dissipation of heat thereon.

Cooling elements can also be employed on the flexible element 3. By incorporating coolers, the flexible element 3 could be made to bend using differential expansion of constituent layers of a laminar flexible element 3 if those layers possessed different coefficients of thermal expansion. The direction of movement would be opposite to that when heat is applied to the flexible element 3.

The detecting device 1 may also comprise a combined heater and cooler for heating/cooling of the fluid itself, such that measurements may be made at selected temperatures. This heater and cooler may reside on the body region 2 or on the flexible element 3. A movement (e.g. current) signal applied to the heater 4 may be any predetermined function. For example, the signal may be a sine wave, a modulated sine wave, a square wave, a single pulse or a continuous current of a constant value.

It will be clear that by using a plurality of flexible elements 3 simultaneously, a plurality of measurements can be simultaneously made. For example, using three independent flexible elements 3, the temperature, viscosity and flow rate of a fluid sample can be measured simultaneously. A plurality of devices 1 may be used in order to obtain the desired number of flexible elements 3, each device comprising one or more flexible element 3. Alternatively, a single device 1 comprising the desired number of flexible elements 3 (appropriately configured) may be used. The flexible elements 3 may be in any desired configuration. For example, two rows of the flexible elements 3 may be interdigitated.

A spatial profile of the properties of a fluid can be obtained by using a plurality of flexible elements 3 /devices 1 located at different positions within the fluid. Thus, by using a device 1 comprising a plurality of flexible elements 3, such a profile can be readily obtained. It will be appreciated that such a profile can be obtained in real-time.

For example, by measuring the flow rate of a fluid at a plurality of locations, the shear rate of the fluid may be obtained. By obtaining profiles in real-time, changes therein can be accurately determined. Such changes may be natural, for example the loss of heat energy, or induced, for example the introduction of a chemical to the fluid.

It will be appreciated that, just as a fluid can have an influence on a flexible element 3, a flexible element 3 may have an influence on the fluid. For example, movement of a flexible element 3 in a fluid may cause turbulence therewithin. Movement of a flexible element 3 in a fluid may also cause flow therewithin. Co-ordinated and specific movement of a plurality of flexible elements 3 can cause a specific flow in the fluid. Thus, flow can be artificially induced in a fluid. For example, flow can be induced in a fluid in order to simulate the flow of that fluid in a pipe. Properties of the fluid may then be determined while the fluid is undergoing such flow.

Using a plurality of flexible elements 3, some of the plurality may cause flow within a fluid e.g. by cyclically operating the elements 3. One or more other elements 3 may be used to characterise that flow. For example, a device may comprise seven interdigitated flexible elements. A first, third, fifth and seventh flexible element 3 may be arranged to generate a flow within a fluid.

For example, movement of the first, third, fifth and seventh flexible element 3 can be controlled such that the movements 'cascade'. As the first element is made to move from the first to the second configuration, the third element 3 is made to move from the second to the first configuration, and as the third element 3 is made to move from the first to the second configuration, the fifth element 3 is made to move from the second to the first configuration etc. While the first, third, fifth and seventh flexible elements generate flow in the fluid, the second, fourth and sixth elements can be used to characterise that flow. For example, they can be used simultaneously to determine the shear rate of the fluid. Alternatively, or additionally, they can be used to determine different properties. For example, the second flexible element 3 may determine temperature of the fluid, the fourth flexible element 3 the fluid viscosity, and the flow rate may be determined by the sixth flexible element.

The device 1 may reside in a container such that environmental conditions within the container may be accurately monitored and controlled. For example, pressure and/or temperature within the container may be monitored and/or controlled. Such monitoring may be implemented and control exerted upon on any fluid residing within the container. It will be appreciated that only the flexible element(s) 3 of the device 1 may reside within the container, with the body region 2 of the (or each) device 1 residing outside of the container. Control or knowledge of the temperature of the fluid is useful when the viscosity of the fluid is being measured. This is especially true in the measurement of blood viscosity, as the viscosity of blood varies significantly with changes in temperature. Thus, temperature controlling and sensing devices may be used to actively control the temperature of the fluid within the container. For example, heaters and/or coolers may be used. The heaters and/or coolers may be independent apparatus, completely separate from the sensing device 1. Alternatively, the heaters and/or coolers may be integral to the sensing device 1. The temperature sensing device may also be separate from or integral to the sensing device 1. It will be readily appreciated that the temperature sensing device may be a flexible element 3 comprising layers of material with different coefficients of thermal expansion, as hereinbefore described.

It will be appreciated that the detecting device 1 may form an integral part of a larger, more complex system. For example, due to its ease of manufacture, the detecting device 1 can be fabricated at a low cost, which introduces the possibility of a readily disposable device 1. Although when determining properties of, for example, water the device 1 may or not need to be reusable, it is ideal in some circumstances that the device 1 is disposed of after a single use. This may be the case for a number of reasons, for example hygiene, contamination etc. A scenario where hygiene and contamination are of critical importance is the area of blood testing, and in particular the testing of human blood. This device 1 can be fabricated in extremely small sizes and thus it can be easily integrated into a blood extraction and testing system. Furthermore, due to the small size, a correspondingly small fluid sample is required.

For example, blood viscosity is related to deep vein thrombosis which has in turn been related to long-haul aeroplane flights. Ideally, a passenger could measure the viscosity of his/her own blood and therefore determine whether any blood-thinning agent needed to be taken (e.g. aspirin). The device 1 (or more than once device 1) could be integrated with a microneedle (for painless extraction of blood), and have readily detachable electrical connections that are designed to engage like connections on a small, handheld processing terminal. A needle and device 1 could be attached and thereby electrically connected to the terminal, and the passenger could painlessly extract blood from his/herself. Controlled by the terminal, the device 1 would then operate as described hereinabove, and yield information about the blood. The terminal could include a simple display with information such as the viscosity of the blood, whether it was at a dangerous level etc. Being small and cheap, the needle and device 1 could then be disposed of with little cost. The terminal could be used again with another needle and device 1. Hence, many devices 1 may be used on a single flight.

It is clear that the functionality of the device 1, together with its small size and low cost of fabrication make its use advantageous in a wide variety of applications where the determination of fluid properties, for example viscosity, temperature, flow rate and shear rate, is required. Preferably the fluid is a liquid. Preferably the liquid is blood or a constituent part thereof, such as plasma. Preferably the volume of fluid from which its properties are determined is of the order of 1 microlitre.

**CLAIMS**

1. A device for detecting a property of a fluid comprising:  
a body region;  
a flexible element having a first end and a second end, said first end being fixedly located on said body region, said flexible element being arranged to move from at least a first configuration to a second configuration via bending of said flexible element;  
said flexible element comprising an actuating portion arranged to move said flexible element between said first configuration and said second configuration; and  
a movement detector for detecting movement of said flexible element.
2. A device as claimed in claim 1, wherein said flexible element comprises a laminate of at least two layers.
3. A device as claimed in claim 2, wherein the actuating portion is provided by at least a first layer of said laminate having a different coefficient of thermal expansion from a second layer of said laminate such that a change in temperature of said flexible element moves the flexible element from said first configuration to said second configuration.
4. A device as claimed in claim 2, wherein at least one of said layers comprises a piezoelectric material, arranged such that an electric field applied across said piezoelectric material moves said flexible element between said first configuration and said second configuration.
5. A device as claimed in claim 1 or 2, wherein said actuating portion comprises a magnetic material for movement of the flexible element between said first configuration and said second configuration by a magnetic field.



6. A device as claimed in any preceding claim, further comprising latching means arranged to hold the flexible element in at least one of said two configurations.

7. A device as claimed in any preceding claim, wherein said flexible element comprises a heating element for heating at least said flexible element.

8. A device as claimed in any preceding claim, wherein said movement detector is arranged such that an electrical property of said movement detector changes due to movement of said flexible element.

9. A device as claimed in claim 8, wherein said movement detector comprises a piezoresistive element located on said flexible element arranged such that the electrical resistance of the piezoresistive element changes due to movement of said flexible element.

10. A device as claimed in claim 8, wherein said movement detector comprises a capacitor having two plates, the flexible element forming one plate thereof, and an electrically conducting plate forming the other plate, such that the capacitance of said capacitor changes due to movement of said flexible element.

11. A device as claimed in any preceding claim, wherein said movement detector comprises an electromagnetic radiation source arranged to direct radiation towards said element, and an electromagnetic radiation detector arranged to detect electromagnetic radiation at least one of: reflected from, transmitted through, refracted from or diffracted by said flexible element.

12. A method of determining a property of a fluid using a sensing element comprising:

a flexible element movable from a first configuration to a second configuration via bending of said flexible element, said flexible element comprising an actuating portion arranged to move said flexible element between said first configuration and said second configuration, the method comprising:

receiving a signal from the sensing element, the signal being indicative of movement of the flexible element within said fluid; and

processing said signal to determine at least one property of said fluid,

13. A method as claimed in claim 12, wherein said signal is processed to determine at least one property of a group comprising viscosity, temperature, flow rate and shear rate.
14. A method as claimed in claim 12 or 13, further comprising the step of inducing movement in said flexible element by applying a movement signal to said sensing element.
15. A method as claimed in claim 14, further comprising:
  - determining the resonant frequency of said flexible element in said fluid by applying a plurality of different frequency movement signals to said sensing element;
  - monitoring the amplitude of movement of said flexible element from said received signal to identify a resonant frequency of said flexible element; and
  - determining the viscosity of said fluid from the identified resonant frequency.
16. A method as claimed in claim 14, further comprising:
  - determining a rate of change of movement of said flexible element, by monitoring a change in the received signal with time; and
  - determining the viscosity of said fluid from said rate of change of movement.
17. A method as claimed in claim 14, further comprising:
  - determining an amplitude of movement of said flexible element from said received signal for a given applied movement signal; and
  - determining the viscosity of said fluid from said amplitude.

18. A method as claimed in claim 12 or claim 13, wherein said flexible element comprises a laminate of at least two layers, each layer having a different coefficient of thermal expansion, arranged such that said movement will occur with a temperature change in said flexible element, the method further comprising:

determining a temperature of said fluid from said received signal.

19. A method as claimed in claim 12 or claim 13, further comprising:

determining a magnitude of movement of said flexible element; and

determining a flow rate of the fluid from said magnitude, said movement being due to flow of the fluid against said flexible element.

20. A method as claimed in claim 19, further comprising: determining a shear rate of said fluid by determination of the flow rate at a plurality of locations within said fluid.

21. A method of manufacture of a device for detecting properties of a fluid, the method comprising:

providing a body region;

providing a flexible element having a first end and a second end, said first end being fixedly located on said body region, said flexible element being arranged to move from at least a first configuration to a second configuration via bending of said flexible element; and said flexible element comprising an actuating portion arranged to move said flexible element between said first configuration and said second configuration; and

providing a movement detector for detecting movement of said flexible element.

22. A device for detecting a property of a fluid as hereinbefore described with reference to the accompanying figures.

23. A method of determining a property of a fluid as hereinbefore described with reference to the accompanying figures.

24. A method of manufacturing a device for determining a property of a fluid as herein before described with reference to the accompanying figures.

ABSTRACTFLUID PROBE

A device for detecting a property of a fluid includes a body region and a flexible element having a first end and a second end. The first end is fixedly located on the body region. The flexible element is arranged to move from at least a first configuration to a second configuration via bending of the flexible element. The flexible element includes an actuating portion arranged to move the flexible element between the first configuration and the second configuration. The device also includes a movement detector for detecting movement of the flexible element.

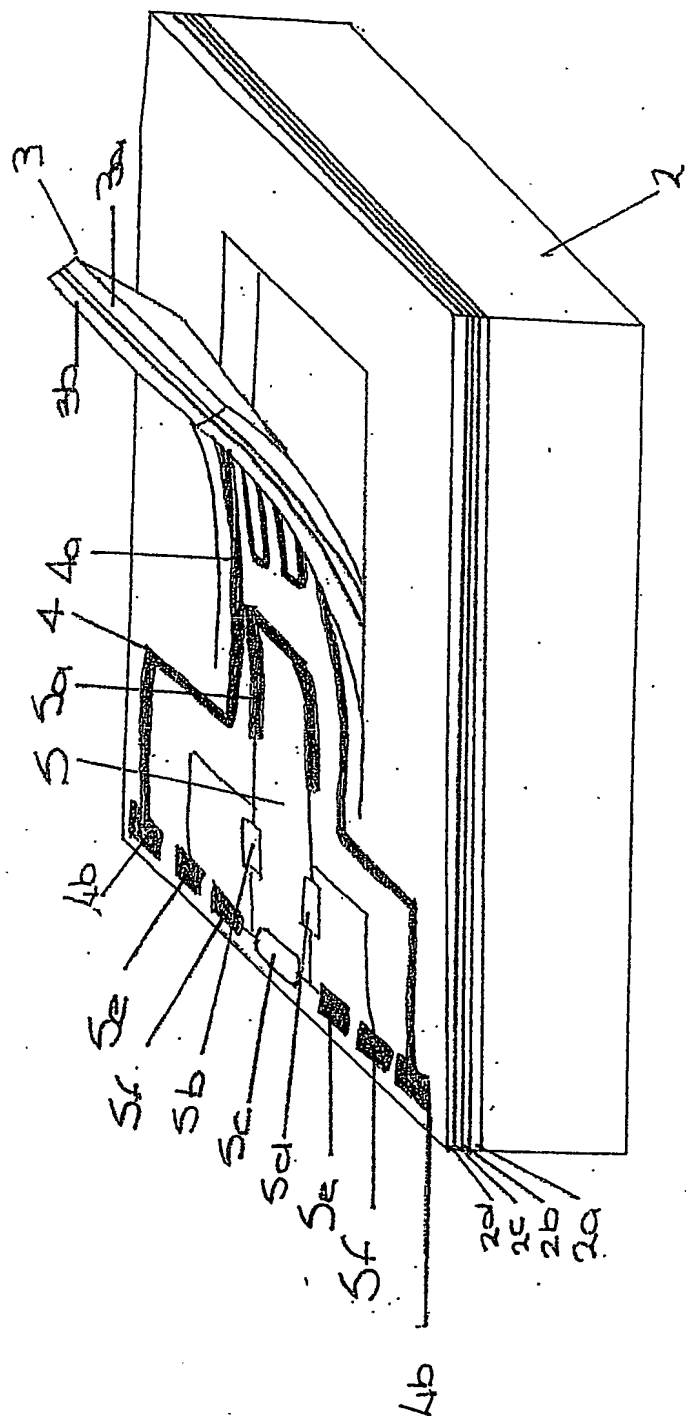


Figure 1

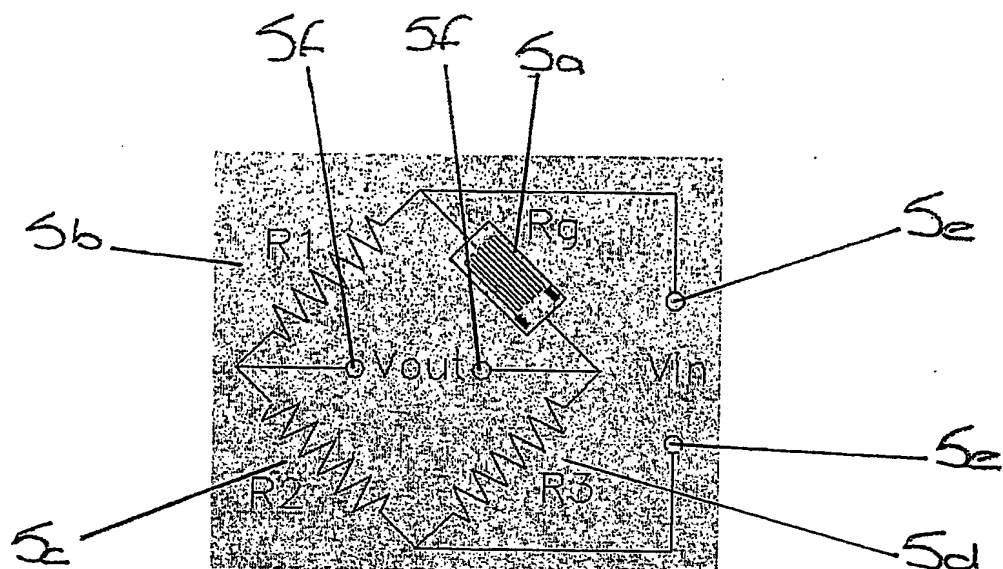


Figure 2

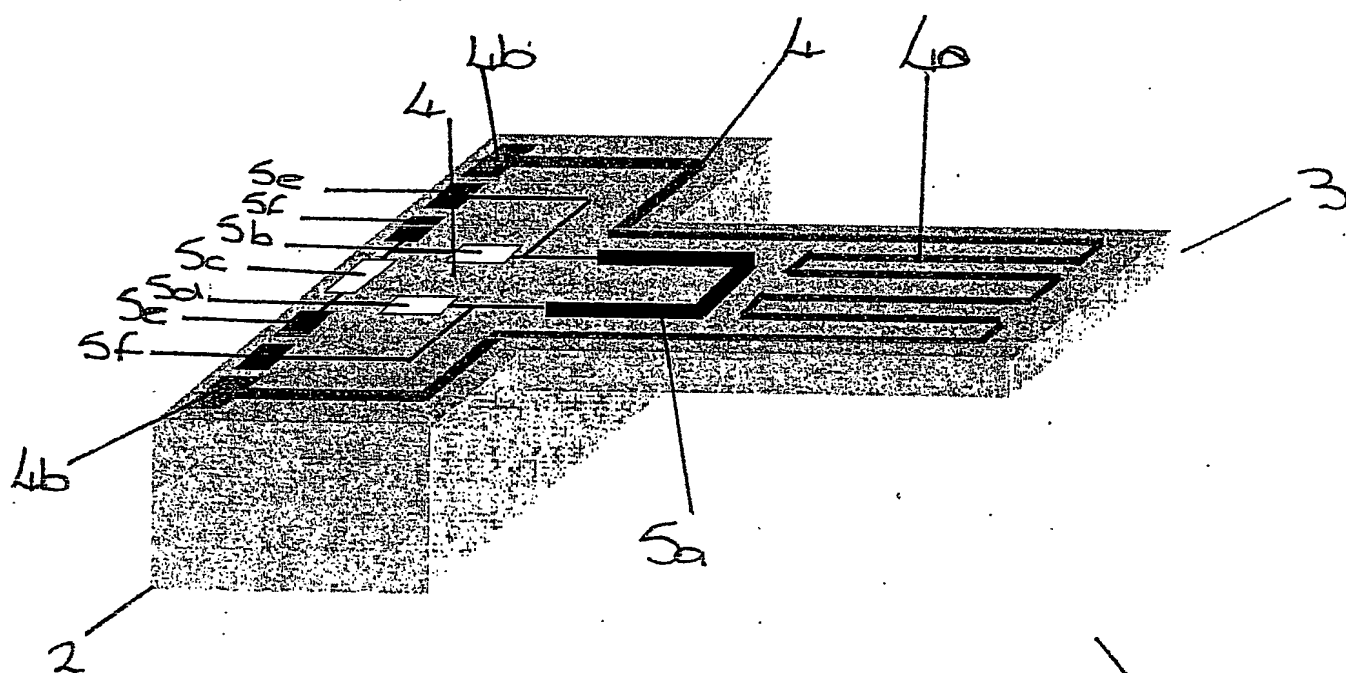


Figure 3

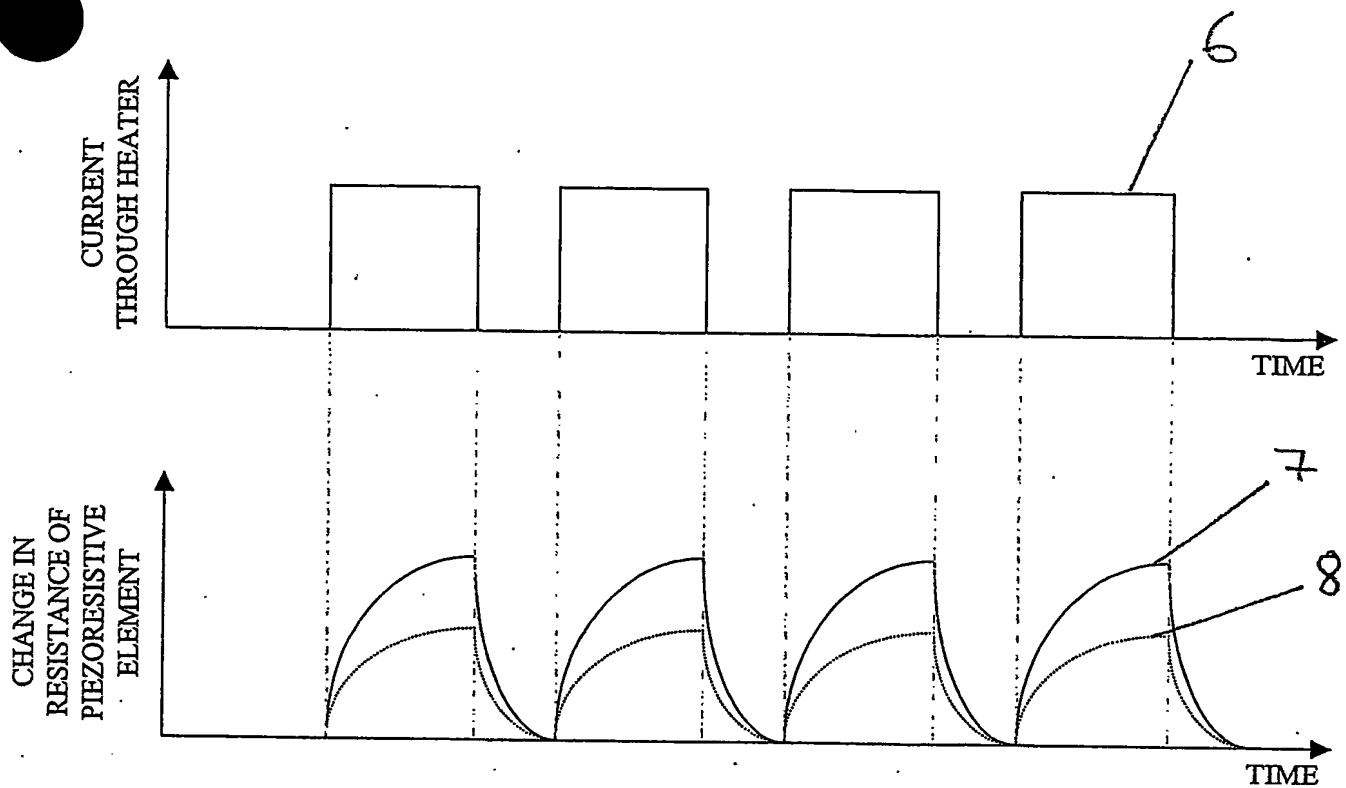
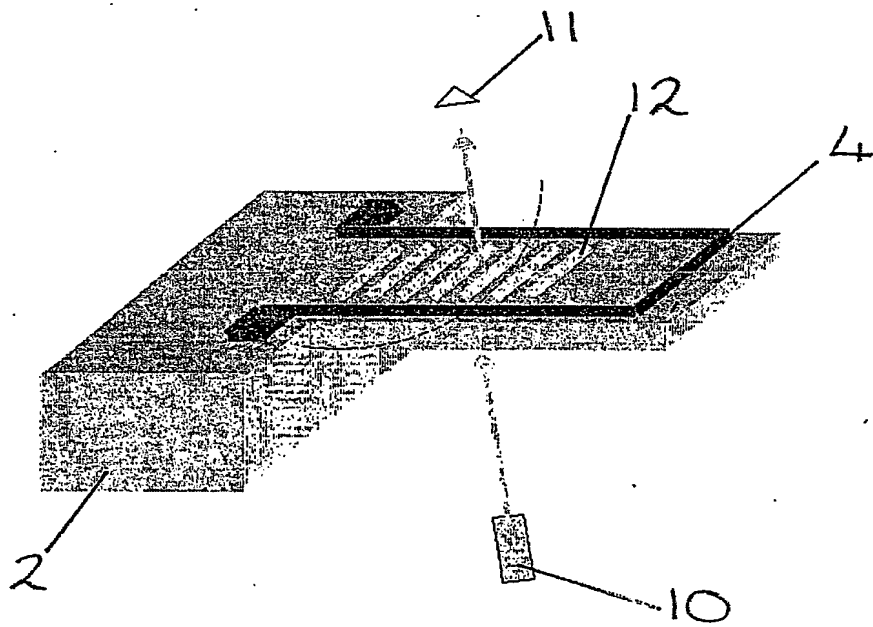
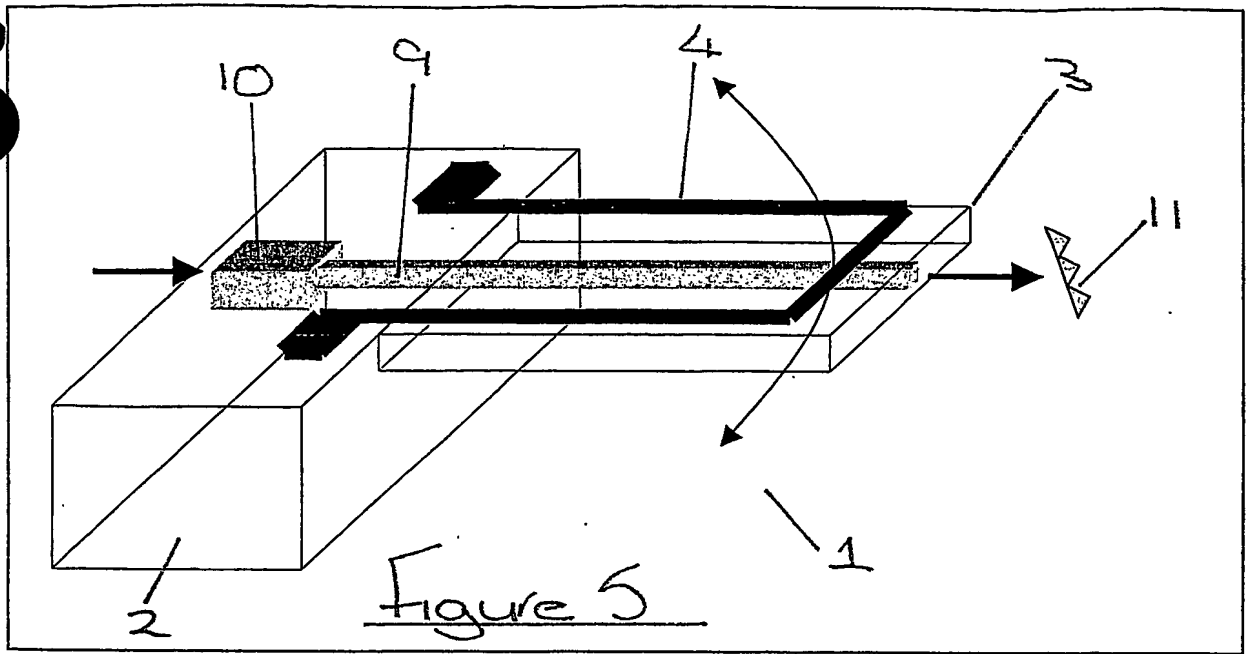


Figure 4





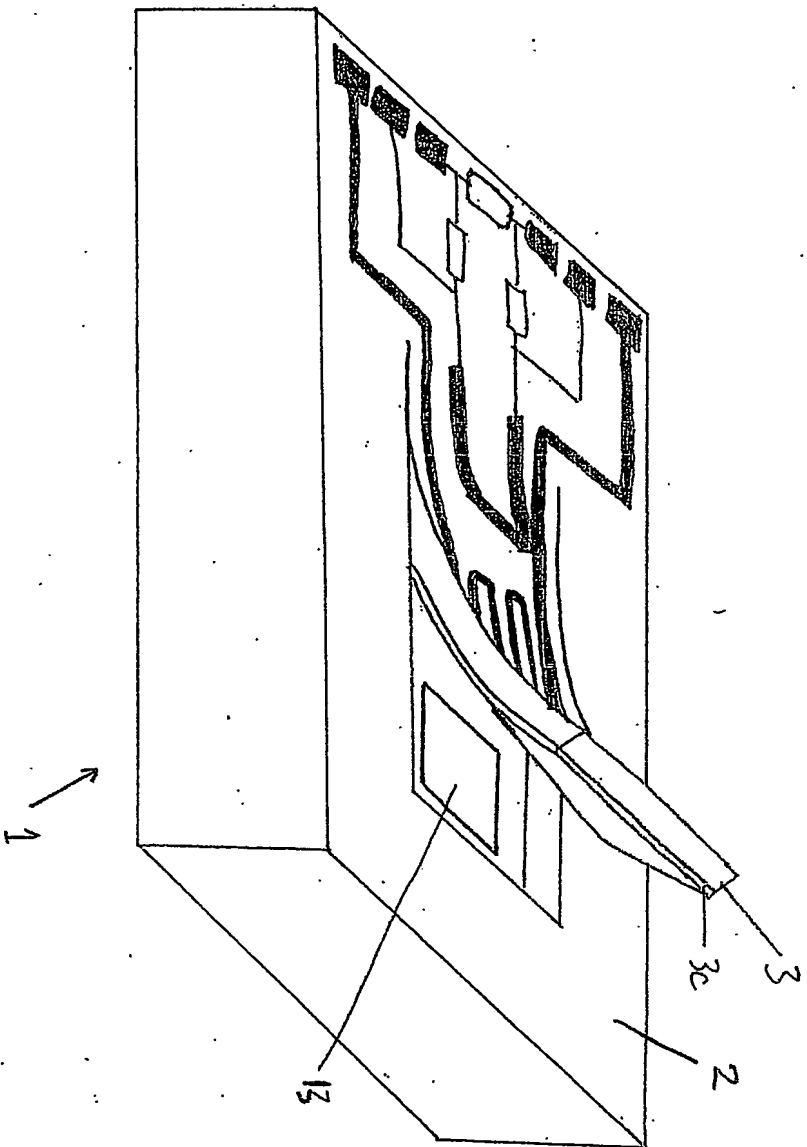


Figure 7

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record.**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**